


# ATO® Smart Glow Blade Fuse


Smart Glow fuses are innovative automotive style fuses that feature an **indicator light that glows when the fuse is blown**, saving time to troubleshoot an open circuit.

Interrupting Rating: 1000A @32VDC  
 Voltage Rating: 32 VDC  
 Operating Temperature Range: -40°C to +125°C  
 Terminals: Tin plated Zinc alloy

## DIMENSIONS

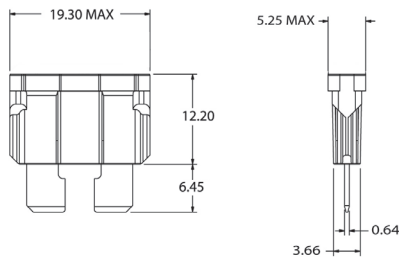


## TEMPERATURE DERATING CURVE

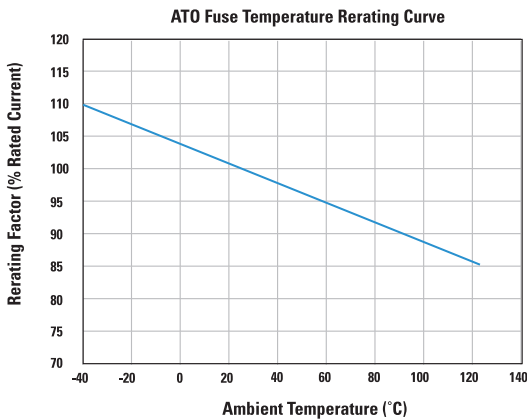

## TIME-CURRENT CHARACTERISTICS

% of Rating	Opening Time	Opening Time Min / Max (s)
100	35-40	360,000 s / -
110	1-30	360,000 s / -
135	1-2 3-40	350ms / 600 s 0.750 s / 600 s
200	1-2 3-40	100 ms / 5.0 s 0.150 s / 5.0 s
350	1-2 3-40	20 ms / 500 ms 80 ms / 500 ms
600	1-30 35-40	- / 100 ms - / 150 ms

## TIME-CURRENT CHARACTERISTIC CURVES

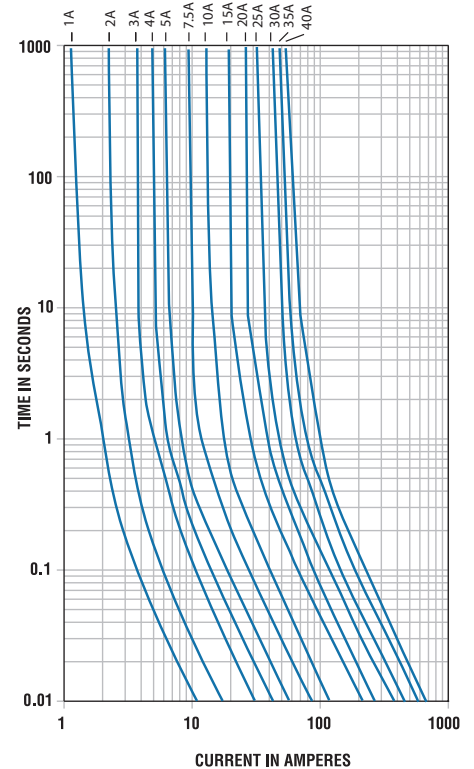

## ATO® SMART GLOW FUSE TABLE

COLOR CODE	CURRENT RATING (A)	CARDED	
		MATERIAL #	CATALOG #
Black	1A	---	---
Gray	2A	---	---
Violet	3A	OAT0003.VPGLO	10-0003
Pink	4A	---	---
Tan	5A	OAT0005.VPGLO	10-1000
Brown	7.5A	OAT0007.VPGLO	10-0007
Red	10A	OAT0010.VPGLO	10-1001
Blue	15A	OAT0015.VPGLO	10-1002
Yellow	20A	OAT0020.VPGLO	10-1003
Clear	25A	OAT0025.VPGLO	10-1004
Green	30A	OAT0030.VPGLO	10-1005
Orange	40A	---	---



## SMART GLOW ATO® BLADE FUSE 80PC COMMERCIAL KITS

Material #	Description
00940510ZXGLOA-LIT	Commercial Assortment - MINI SmartGlow 32V 80pc
00940509ZXGLOA-LIT	Commercial Assortment - ATO SmartGlow 32V 80pc



## HEAVY DUTY ATO® SMARTGLOW IN-LINE FUSE HOLDER

Material #	Description
0FHM0001XPGLO-LIT	Fuseholder Inline Mini SmartGlow
0FHA0001XPGLO-LIT	Fuseholder Inline ATO SmartGlow



For prices and more information, please contact your nearest branch:

TORONTO (HEAD OFFICE)  
Tel: 905.673.0000

MONTREAL  
Tel: 514.344.3536

EDMONTON  
Tel: 780.453.5895

[www.docap.com](http://www.docap.com)

03.08.17