




PRODUCT CATALOG

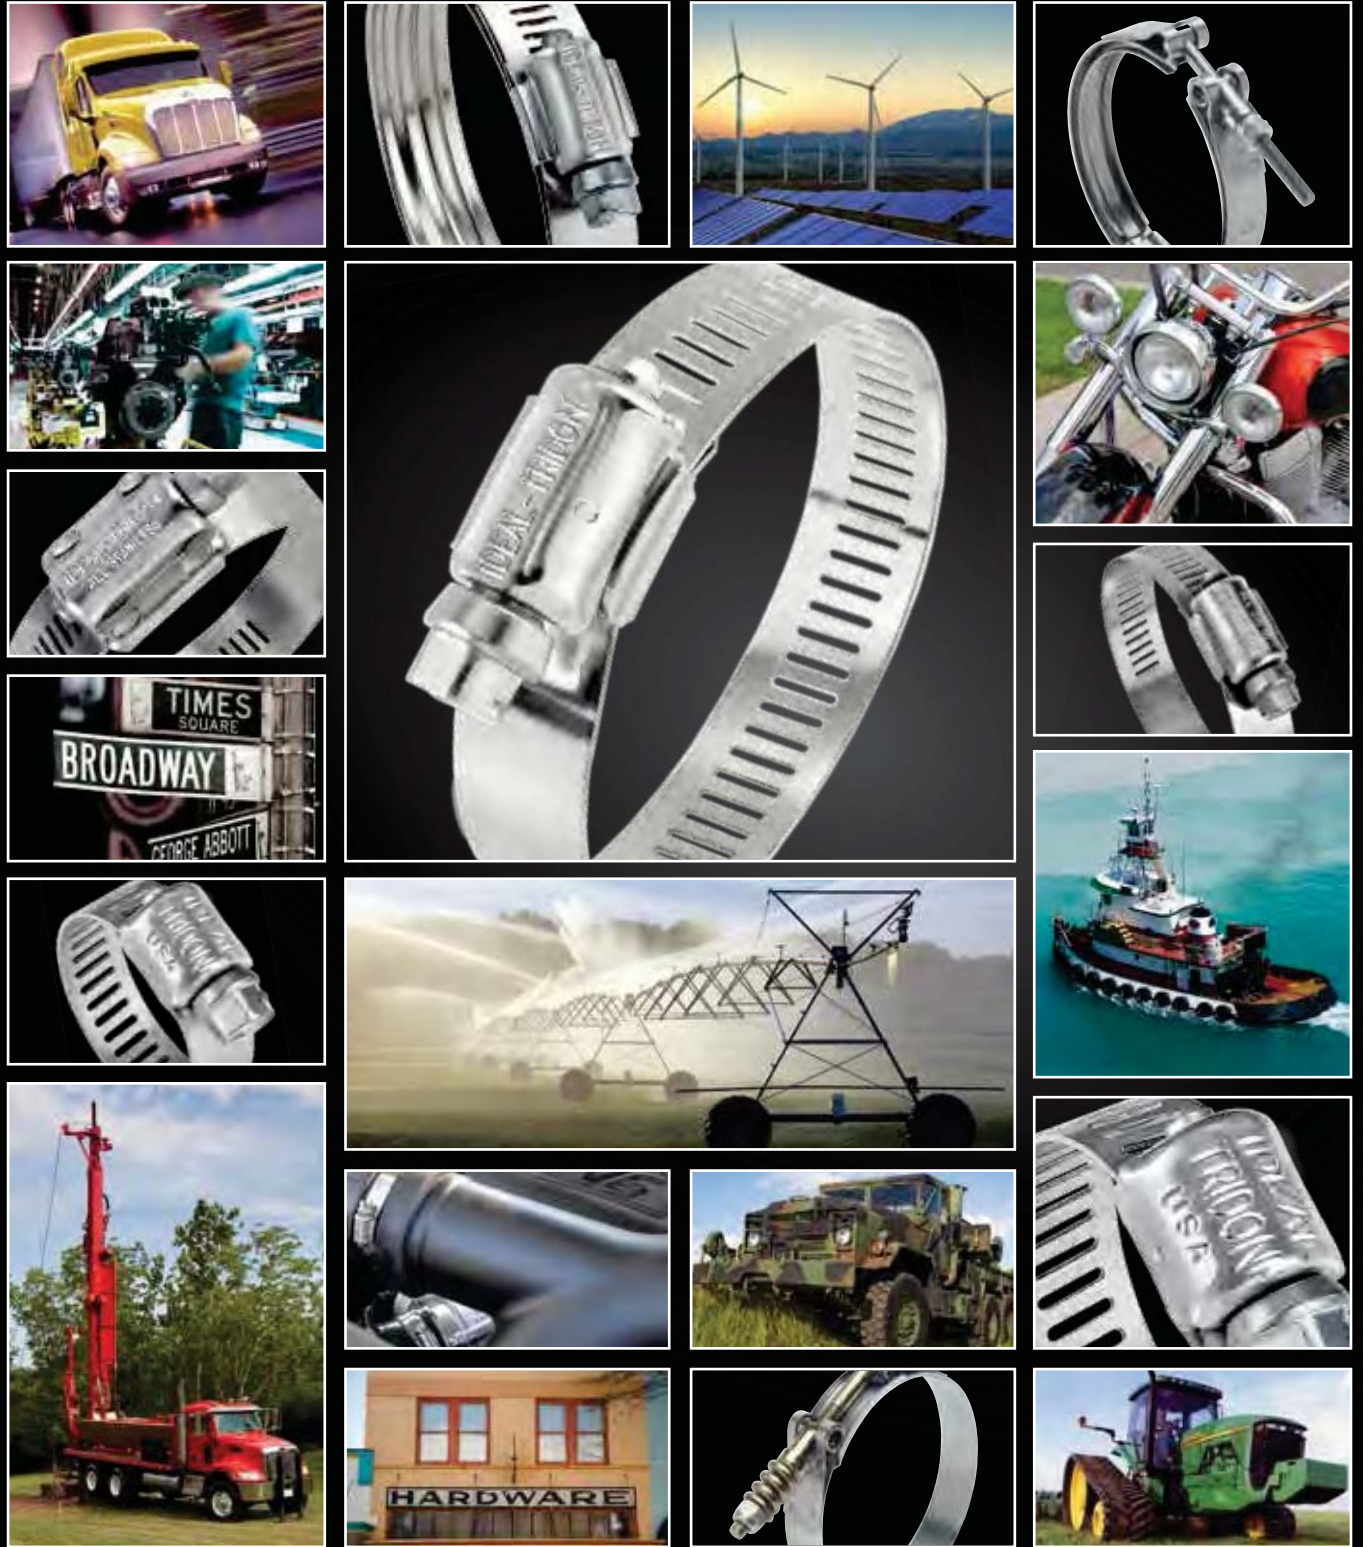

PROVEN DESIGNS, BILLIONS OF TIMES | IDEALTRIDON.COM

About Us 3

Engineering & Quality 4

How to Use this Catalog 6

Products

SmartSeal™ (37215)

WaveSeal³⁶⁰® (36003)

SmartSeal™ HD (38215) 8

Micro-Gear® (62J, 62M, 62P) 10

Fuel Injection (52F) 11

1/2" Hy-Gear® (67-4, 67-1, 57-0, 67-6) 12

9/16" Hy-Gear® (63-4, 68-0, 50-0, 64-0) 14

Non-Perforated (9mm, 12mm) 16

Combo-Hex® (54-0)

Military Worm Drive (632) 18

Surelock Quick Engage (48, 49) 19

Snaplock® Quick Release (56-0, 500, 58-0, 550) 20

Wraplock® (59-0)

Lox-On® (60-0) 22

Turn-Key® (5Y)

Flexible Hose Clamp Driver 23

Lined (65E, 615, 53-0, 67M) 24

Pow'r Gear® (60, 6P, 6L, 6M, 6X) 26

T-Bolt (30010, 30011, 30020, 30021) 28

Spring-Loaded T-Bolt (30030) 30

V-Bands 31

Flex-Gear® (43, 47, 41, 45) 32

Merchandisers & Packaging 34

Hose ID Reference Guide 38

Product Cross Reference Guide 39

**Ideal Clamp Products, Inc.
Global Headquarters**

8100 Tridon Drive
Smyrna, TN USA 37167-6603
T: 800.251.3220 615.459.5800
F: 615.223.1550

Ideal Clamp Products, Inc.

7765 Padre Island Hwy. Ste 500
Brownsville, TX USA 78521
T: 956.838.5488 F: 956.838.5489

Auto Industrial de Parts, S.A. De C.V.

Lic. Albino Hernández No. 7 Pte.
H. Matamoros, Tamaulipas, Mexico 87340
T: +52.868.810.8310 F: +52.868.813.5668

Ideal Internacional S.A.

Mariano Matamoros #276
Col. Tlalpan, C.P. 14000
México D.F. Mexico
T: +52.55.5573.5696 F: +52.55.5573.6976

Ideal Tridon Clamps (Suzhou) Co., Ltd.

Unit 16 Suchun Industrial Square
428 Xing Long Street, Suzhou Industrial Park
Suzhou, Jiangsu, PRC China, 215126
T: +86.512.8717.8660 F: +86.512.6283.8665

**Ideal-Tridon Clamp Products
Sawakyu Industries Co Limited**

JR Central Towers 40fl. Suite 4008, 1-1-4 Meieki
Nakamura-ku, Nagoya, 450-6040, Japan
T: +81.52.581.3900 F: +81.52.581.3902

Tridon Clamp Products GmbH

Robert-Bosch-Str. 10
53919 Weilerswist, Germany
T: +49.2254.836370

Tridon Clamp Products GmbH

ul. Aleksandra Fredry 3
57-350 Kudowa Zdro'j / Poland
T: +48 747135354

Industry Markets

- General Aftermarket & Replacement
- OEM: Original Equipment Manufacturing
- Telecommunications
- Heavy Equipment
- Government & Military
- Food Processing & Sanitation
- Industrial
- Truck & Engine
- Automotive
- Marine
- Hardware
- Plumbing

Global Presence

- Tennessee, USA Headquarters
- Texas, USA
- Matamoros, Mexico
- Mexico City, Mexico
- Suzhou, China
- Tokyo, Japan
- Weilerswist, Germany
- Kudowa Zdro'j / Poland
- Mumbai, India



IDEAL-TRIDON: The Fusion of Experience and Strength

When Ideal and Tridon merged over a decade ago, two extraordinary companies with complementary strengths joined to create one world class leader in the engineered joint sealing industry. A reputation for superior quality was built upon both IDEAL brand and TRIDON brand products. For over a decade both brands have been made in the same facilities to the same high quality standards demanded by OEM and aftermarket customers alike. The next step is the evolution of the two brands to one—the IDEAL-TRIDON brand. The new IDEAL-TRIDON brand being introduced with this catalog represents the legendary quality, reliability, and innovative engineering for which our products have always been known.

Although IDEAL-TRIDON is a forward-focused brand, we're also commemorating the rich and diverse history that led us to where we are today. The year 2013 marks a combined 190 years of experience in developing innovative joint-sealing solutions. Ideal was founded in 1913 by Philip Rauch, a taxi cab owner/operator with a background in automotive engineering. Tridon began in 1923 by Don Green, a young man trying to prove he could make it on his own. Throughout the last century literally billions of clamps have been made by the companies started by these two visionaries. The foundation for success built by both men sustains us to this day and will continue with our commitment to provide innovative clamping solutions backed by the best service in the industry.

Today we continue to build upon our founders' innovative spirit by constantly pushing boundaries with new IDEAL-TRIDON products. Our latest innovation is

the SmartSeal™ product line being introduced in this catalog. This next generation clamp uses patent-pending technology to continuously seal in a steady 360 degree pattern while responding to pressure and temperature changes. We'd say that's pretty smart! Weighing less than traditional self-compensating clamps, SmartSeal is now being used on the newest fuel-efficient vehicles coming to market.

With the IDEAL-TRIDON brand, you're getting a product backed by 190 years of combined engineering excellence. Customers worldwide count on us to seal critical connections. Shouldn't you? After all, we've provided *"Proven Designs, Billions of Times."*

IDEAL-TRIDON Customers benefit from:

- The widest selection of bands, screws, housings and special features
- Custom design and engineering expertise
- Metallurgical science specialists
- Automated assembly processes
- Advanced screw manufacturing technologies
- High-speed stamping
- Sensors and visual control systems
- Attractive and marketable packaging
- Established distribution channels
- Quality testing and analysis
- Performance and specifications documentation
- Inventory control options



IDEAL-TRIDON's superior quality, environmental responsibility and process integrity has earned us certifications for TS16949 as well as ISO 9001 and 14001. All our facilities worldwide use only the finest quality certified steel and the best practice manufacturing processes to craft clamp products you can trust today and years into the future.

We operate using the latest manufacturing equipment and facilities, from networked manufacturing complexes to advanced laboratory analysis. Our diversified team of engineers and operators are equipped with the most sophisticated testing labs and machine-tuning capabilities. We test and certify our clamp performance to stringent industry standards and real-life conditions to ensure your satisfaction.

Powerful Partnership

Let us help you create a clamp offering for your distribution or supply your next order for a production line. We can connect you with our sales representatives and welcome you to partner with us as you plan your next clamp program.

IDEAL-TRIDON brand offers:

- Unmatched customer service
- Mission critical engineering talent
- The world's broadest range of superior clamping products

Customization

IDEAL-TRIDON is the industry leader in custom joint sealing products. We can develop custom designs for any application, from band notching and slotting to special finishes and screw head designs. Using 3-D modeling that includes stress and finite element analysis, we can help determine the best materials and configuration for your application.

Custom Options:

- Special cut-out and detents added to bands
- Black e-coat or black oxide finishes
- Locating clips to pre-attach clamps to hoses
- Positioning clips to set the clamp distance from the end of a hose
- V-band clamps in custom configurations
- Materials specific for your operating environment
- And more!

Whether you need a standardized product or specialized attention, we have the team, the facilities and the knowledge to deliver a sealing solution.

**A****B****C****D****E****F**

Photo Captions

- A. VMM and CMM equipment provides precision measuring capability
- B. Full metallurgical laboratory capabilities for identification of alloys, material hardness and micro-structure
- C. On-site laboratory PVT chamber enables SAE J1610 pressure, vibration, and thermal testing
- D. Micro-hardness tester provides accurate and fast in-depth analysis of components and finished product specimens
- E. Accurate and controlled corrosion testing is possible using our salt-fog and cyclical corrosion test chambers
- F. The 8-segment load tester and DC servo installation tools allow for quick and accurate installation simulations

HOW TO USE THIS CATALOG

Part Number Explanation

IDEAL-TRIDON uses both **12-digit and 7-digit part numbers** with Tridon part numbers listed for reference only. Putting your part number together is an easy two-step process.

1. **Select the Ideal-Tridon part number by series and size** listed in the tables throughout the catalog.
2. **Add the appropriate pack code to the end.** 7-digit part numbers use a 2-digit pack code and 12-digit part numbers use a 3-digit pack code.

Pack Type	7-Digit Pack Code Suffix	12-Digit Pack Code
10-Pack <i>(up to size 104)</i>	51	051
Bulk	52	052
10-Pack Individually Barcoded <i>(up to size 104)</i>	53	053
* Not every product available in 10-Pack configuration		

Products are Color-Coded for Easy Identification

FIND YOUR PART NUMBER					Products are Color-Coded for Easy Identification							
Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 67-4	Tridon 620P	Ideal-Tridon 67-1	Tridon 625/HAS	Ideal-Tridon 57-0	Tridon 611/HS	Ideal-Tridon 67-6	Tridon 665
6	3/8	7/8	10	22	67004-0006	620-P06	6706-1	625-006	57060	611-006	6706-6	665-006
8	7/16	1	11	25	67004-0008	620-P08	6708-1	625-008	57080	611-008	6708-6	665-008

Clamp Sizing Information: Min-Max Diameter

Order with Ideal-Tridon No.

Reference Only

EXAMPLE USING 12-DIGIT PART NUMBERS (Ordering a Size 06 1/2" Hy-Gear 67-4 in a 10-Pack)

Series (First 5 Digits)	+	Size (Next 4 Digits)	+	Pack Code (Last 3 Digits)	=	Complete Part Number
67004 (Series 67-4)	+	0006 (4-Digit Size)	+	051 (3-Digit Pack Code)	=	67004-0006-051

EXAMPLE USING 7-DIGIT PART NUMBERS (Ordering a Size 06 1/2" Hy-Gear 67-1 in 10-Pack)

Series & Size (First 5 Digits)	+	Pack Code (Last 2 Digits)	=	Complete Part Number
6706-1 (Series 67-1 in Size 06)	+	51 (10-Pack)	=	6706-1-51

About Our Clamps (3 Piece Design)

ONE-PIECE HOUSING

One piece mechanically interlocked housings are made from a single stamping with no tabs or stakes that can fail under higher tightening torques



MULTIPLE BAND WIDTHS

Our three piece clamps are produced in a multitude of band widths in a large variety of sizes, traditionally sized in increments of 1/16"

RECTANGULAR SHAPED NOTCHES

The rectangular notch design utilizes a radius at each corner which minimizes stress cracking under higher band loads and enhances the overall strength of the band













MORE CORROSION RESISTANCE

FIND YOUR MATERIAL

		Plated Carbon Steel	400 Stainless	200 Stainless	300 Stainless	316 Stainless
Markets	Automobile	•	•	•	•	•
	Farm	•		•	•	•
	Food				•	•
	Garden			•	•	•
	Heavy Duty		•		•	•
	Home	•	•	•	•	•
	Industrial/MRO	•		•	•	•
	Marine				•	•
	Medical					•
	Plumbing/Watersystems		•	•	•	•
	Turbo/Forced Air		•		•	•
Characteristics	Highest Corrosion Resistance					•
	Best Corrosion Resistance				•	
	Better Corrosion Resistance			•		
	Good Corrosion Resistance		•			
Properties*	Material is "Non-Magnetic"			•	•	•
	Material is "Magnetic"	•	•			
Certifications	IAPMO Listed Product Applications			•	•	


*Materials may exhibit relatively small amounts of residual magnetism as a result of the manufacturing process

Icon Key





					
BAND Width & Material	BOLT Size & Material	BRIDGE Width & Material	HOUSING Size & Material	LINER Width & Material	NUT Size & Material
					
SCREW Size & Material	SPRING Size & Material	SPRING LINER Width & Material	T-BOLT Size & Material	TRUNNION Material	RIT* In-lbs & Nm


***RECOMMENDED INSTALLATION TORQUE**
Overtightening your clamp can damage your hose and decrease clamping efficiency.

SmartSeal and **WaveSeal³⁶⁰** hybrid smart clamps secure hose connections and prevent unwanted flow of fluid and air. Through patented hybrid technology, these next generation clamps seal in a steady 360 degree pattern in response to pressure and temperature changes. With their compact design and lower profile, you get an optimal heavy-duty constant tension clamp without all the bulk.








SmartSeal Ideal-Tridon 37215

5/16" Hex Head	Housing	1/2" Band	1/2" Spring Liner
			
300 Stainless	300 Stainless	300 Stainless	300 Stainless







WaveSeal³⁶⁰ Ideal-Tridon 36003

5/16" Hex Head	Housing	9/16" Band	9/16" Spring Liner
			
410 Stainless	300 Stainless	300 Stainless	300 Stainless



SmartSeal HD Ideal-Tridon 38215

5/16" Hex Head	2-Piece Housing	5/8" Band	5/8" Spring Liner
			
410 Stainless	300 Stainless	300 Stainless	300 Stainless

THE SMARTSEAL CHANNEL DESIGN

High Pressure

- Spring compensation over 360 degrees
- Improved clamp roundness eliminates leak paths at housing juncture
- Trough-shaped design creates higher pressure loading compared to conventional worm gear, increasing resistance against potential leaks
- Trough shape helps clamp "grip" by penetrating deeper into the hose wall over a narrower cross-section (footprint)

THE WAVESEAL O-RING EFFECT

High Pressure Low Pressure High Pressure

- Spring compensation over 360 degrees
- Improved clamp roundness eliminates leak paths at housing juncture
- O-ring effect allows hose to act as an additional spring component
- Outside, chamfered liner edge protects hose component from cutting

WHICH CLAMP IS RIGHT FOR ME?

General Guidelines	SmartSeal	WaveSeal ³⁶⁰	SmartSeal HD
Wall Thickness	Greater than .177" (4.5 mm)	Less than .177" (4.5 mm)	.080 to .315" (2-8 mm)
Hose Diameter	Greater than 3" (76 mm)	Less than 3" (76 mm)	Greater than 2" (51 mm)
Installation Torque (Most Applications)	Up to 48 lb-in (5.5 Nm)	Up to 70 lb-in (8 Nm)	100 lb-in (11 Nm)
Band Width	1/2"	9/16"	5/8"

FIND YOUR PART NUMBER

Size	Min (in)	Max (in)	Min (mm)	Max (mm)	SmartSeal	WaveSeal ³⁶⁰
16	1-3/32	1-5/16	28	35.5	37215-0016*	36003-0016
20	1-1/8	1-9/16	29	38.5	37215-0020	36003-0020
22	1-7/16	1-11/16	36	43	37215-0022	36003-0022
24	1-1/2	1-13/16	38	46	37215-0024	36003-0024
28	1-3/4	2-1/16	43	52	37215-0028	36003-0028
32	1-15/16	2-5/16	48	59	37215-0032	36003-0032
34	2	2-7/16	50	62	37215-0034	36003-0034
36	2-1/8	2-9/16	53	65	37215-0036	36003-0036
40	2-5/16	2-13/16	58	71	37215-0040	36003-0040
44	2-1/2	3-1/16	63	78	37215-0044	36003-0044
48	2-11/16	3-5/16	67	84	37215-0048	36003-0048
52	2-7/8	3-9/16	73	91	37215-0052	36003-0052
56	3-1/16	3-13/16	77	97	37215-0056	36003-0056
60	3-1/4	4-1/16	82	103	37215-0060	36003-0060
64	3-7/16	4-5/16	87	110	37215-0064	36003-0064
72	3-3/4	4-13/16	96	122	37215-0072	36003-0072
80	4-3/16	5-5/16	105	135	37215-0080	36003-0080
88	4-1/2	5-13/16	115	148	37215-0088	36003-0088

*WaveSeal 360 liner used on SmartSeal size 16 clamp

FIND YOUR PART NUMBER



Size	Min (in)	Max (in)	Min (mm)	Max (mm)	SmartSeal HD
238	1-5/8	2-1/8	42	54	38215-0238
262	1-7/8	2-3/8	48	61	38215-0262
275	2	2-1/2	52	64	38215-0275
288	2-1/8	2-5/8	55	67	38215-0288
300	2-1/4	2-3/4	58	70	38215-0300
325	2-1/2	3	64	77	38215-0325
350	2-3/4	3-1/4	70	83	38215-0350
375	2-7/8	3-1/2	74	90	38215-0375
400	3-1/8	3-3/4	79	96	38215-0400
425	3-5/16	4	84	103	38215-0425
450	3-7/16	4-1/4	88	109	38215-0450
512	4-1/16	4-7/8	103	125	38215-0512
562	4-9/16	5-3/8	115	137	38215-0562
612	5-1/16	5-7/8	128	150	38215-0612

Micro-Gear clamps are tiny, tough and precision-engineered to use in small hose applications including emission control, fuel lines and vacuum hoses. Slim, 5/16" bands and low profile housings allow installation in confined areas.

Micro-Gear Ideal-Tridon 62J • Tridon 359


BEST






1/4" Hex Head	Housing	5/16" Band Width
		
316 Stainless	316 Stainless	316 Stainless

Micro-Gear Ideal-Tridon 62M • Tridon 345/MAH/MAS

BETTER




1/4" Hex Head	Housing	5/16" Band Width
		
300 Stainless	300 Stainless	300 Stainless

Micro-Gear Ideal-Tridon 62P • Tridon 325/MH

GOOD



1/4" Hex Head	Housing	5/16" Band Width
		
Plated Carbon Steel	300 Stainless	300 Stainless

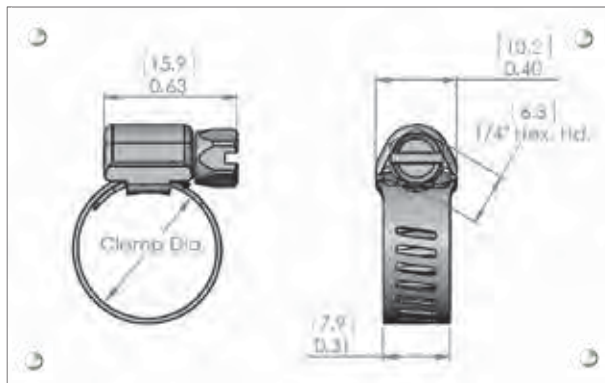


10 to 15 in-lbs (1.1 to 1.7 Nm) for most applications

FIND YOUR PART NUMBER					Ideal-Tridon 62J	Tridon 359	Ideal-Tridon 62M	Tridon 345/MAH/MAS	Ideal-Tridon 62P	Tridon 325/MH
Size	Min (in)	Max (in)	Min (mm)	Max (mm)						
04	1/4	5/8	6	16	62J04	359-004	62M04 ⁽¹⁾	345-004	62P04 ⁽³⁾	325-004
05	1/4	3/4	7	19	-	-	62M05	345-005	62P05	325-005
06	5/16	7/8	8	22	62J06	359-006	62M06 ⁽²⁾	345-006	62P06 ⁽⁴⁾	325-006
08	7/16	1	11	25	62J08	-	62M08	345-008	62P08	325-008
10	1/2	1-1/16	13	27	62J10	-	62M10	345-010	62P10	325-010
12	9/16	1-1/4	14	32	-	-	62M12	345-012	62P12	325-012
16	11/16	1-1/2	18	38	-	-	62M16	345-016	62P16	325-016
20	3/4	1-3/4	19	44	-	-	62M20	345-020	62P20	325-020
24	1	2	26	51	-	-	62M24	345-024	62P24	325-024
28	1-1/4	2-1/4	32	57	-	-	62M28	345-028	62P28	325-028
30	1-3/8	2-3/8	35	60	-	-	62M30	345-030	62P30	325-030
32	1-1/2	2-1/2	38	63	-	-	62M32	345-032	62P32	325-032
36	1-3/4	2-3/4	45	70	-	-	62M36	345-036	62P36	325-036
44	2-1/4	3-1/4	57	82	-	-	62M44	345-044	62P44	325-044
48	2-1/2	3-1/2	64	89	-	-	62M48	345-048	62P48	325-048


⁽¹⁾ Old part no. 62602 ⁽²⁾ Old part no. 62603 ⁽³⁾ Old part no. 6202 ⁽⁴⁾ Old part no. 6203


Fuel Injection clamps are designed to provide the uniform sealing pressure required on fuel injection hoses. They feature a solid band with rolled edges and a special nut and bolt design.

SPECIALTY



Fuel Injection Ideal-Tridon 52F • Tridon 905/FI

7 mm Hex Head

Plated Carbon Steel




9 mm Band Width

Plated Carbon Steel

FIND YOUR PART NUMBER					Ideal-Tridon 52F	Tridon 905/FI
Size	Min (in)	Max (in)	Min (mm)	Max (mm)		
13	7/16	1/2	11	13	52F13	905-004
15	1/2	9/16	13	15	52F15	905-006
16	9/16	5/8	14	16	52F16	905-008

1/2" Hy-Gear clamps are suitable for most common household and automotive applications. The bands have clean punched rectangular perforations that hold strong and connect easily.




BEST

1/2" Hy-Gear Ideal-Tridon 67-4 • Tridon 620P

<p>5/16" Hex Head</p>  <p>300 Stainless</p>	<p>UPC Shield</p>  <p>300 Stainless</p>	<p>1/2" Band Width</p>  <p>300 Stainless</p>
--	--	---

BETTER




1/2" Hy-Gear Ideal-Tridon 67-1 • Tridon 625/HAS*

<p>5/16" Hex Head</p>  <p>410 Stainless*</p>	<p>Housing</p>  <p>200 Stainless</p>	<p>1/2" Band Width</p>  <p>200 Stainless</p>
---	---	---

*Tridon 625 Screw Material is 300/200 Stainless




GOOD

1/2" Hy-Gear Ideal-Tridon 57-0 • Tridon 611/HS

<p>5/16" Hex Head</p>  <p>Plated Carbon Steel</p>	<p>Housing</p>  <p>200 Stainless</p>	<p>1/2" Band Width</p>  <p>200 Stainless</p>
--	---	---

SPECIALTY

1/2" Hy-Gear Ideal-Tridon 67-6 • Tridon 665

<p>5/16" Hex Head</p>  <p>316 Stainless</p>	<p>Housing</p>  <p>316 Stainless</p>	<p>1/2" Band Width</p>  <p>316 Stainless</p>
--	---	---




35 in-lbs (4 Nm) for most applications







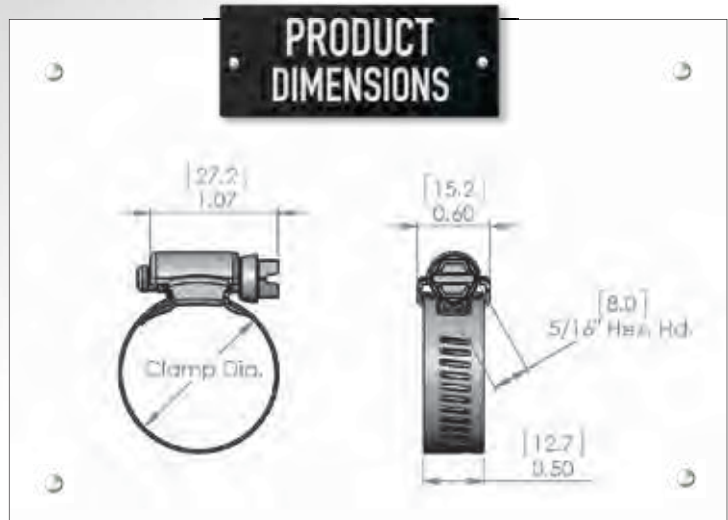









FIND YOUR PART NUMBER

Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 67-4	Tridon 620P	Ideal-Tridon 67-1	Tridon 625/HAS	Ideal-Tridon 57-0	Tridon 611/HS	Ideal-Tridon 67-6	Tridon 665
6	3/8	7/8	10	22	67004-0006	620-P06	6706-1	625-006	57060	611-006	6706-6	665-006
8	7/16	1	11	25	67004-0008	620-P08	6708-1	625-008	57080	611-008	6708-6	665-008
10	1/2	1-1/16	13	27	67004-0010	620-P10	6710-1	625-010	57100	611-010	6710-6	665-010
12	1/2	1-1/4	13	32	67004-0012	620-P12	6712-1	625-012	57120	611-012	6712-6	665-012
16	11/16	1-1/2	18	38	67004-0016	620-P16	6716-1	625-016	57160	611-016	6716-6	665-016
20	3/4	1-3/4	19	44	67004-0020	620-P20	6720-1	625-020	57200	611-020	6720-6	665-020
24	1	2	25	51	67004-0024	620-P24	6724-1	625-024	57240	611-024	6724-6	665-024
28	1-1/4	2-1/4	32	57	67004-0028	620-P28	6728-1	625-028	57280	611-028	6728-6	665-028
32	1-1/2	2-1/2	38	63	67004-0032	620-P32	6732-1	625-032	57320	611-032	6732-6	665-032
36	3/4	2-3/4	19	70	67004-0036	620-P36	6736-1	625-036	57360	611-036	6736-6	665-036
40	1	3	26	76	67004-0040	620-P40	6740-1	625-040	57400	611-040	6740-6	665-040
44	1-1/4	3-1/4	32	82	67004-0044	620-P44	6744-1	625-044	57440	611-044	6744-6	665-044
48	1-1/2	3-1/2	38	89	67004-0048	620-P48	6748-1	625-048	57480	611-048	6748-6	665-048
52	1-3/4	3-3/4	44	95	67004-0052	620-P52	6752-1	625-052	57520	611-052	6752-6	665-052
56	2	4	51	101	67004-0056	620-P56	6756-1	625-056	57560	611-056	6756-6	665-056
60	2-1/4	4-1/4	57	108	67004-0060	620-P60	6760-1	625-060	57600	611-060	6760-6	665-060
64	2-1/2	4-1/2	64	114	67004-0064	620-P64	6764-1	625-064	57640	611-064	6764-6	665-064
72	3	5	76	127	67004-0072	620-P72	6772-1	625-072	57720	611-072	6772-6	665-072
80	3-1/2	5-1/2	89	140	67004-0080	620-P80	6780-1	625-080	57800	611-080	6780-6	665-080
88	4	6	102	152	67004-0088	620-P88	6788-1	625-088	57880	611-088	6788-6	-
96	4-1/2	6-1/2	114	165	67004-0096	620-P96	6796-1	625-096	57960	611-096	6796-6	665-096
104	5	7	127	178	67004-0104	62P-104	67104	625-104	57104	611-104	6799-6	665-104
112	5-1/2	7-1/2	140	190	67004-0112							
116	5-3/4	7-3/4	146	197	67004-0116							
120	6	8	152	203	67004-0120							
128	6-1/2	8-1/2	165	216	67004-0128							
132	6-3/4	8-3/4	171	222	67004-0132							
140	7-1/4	9-1/4	184	235	67004-0140							
152	2	10	51	254	67004-0152							
164	1-3/4	10-3/4	44	273	67004-0164							
176	9-1/2	11-1/2	241	292	67004-0176							
188	2	12-1/2	52	311	67004-0188							
208	11-1/4	13-1/2	294	343	67004-0208							
212	11-1/2	13-3/4	300	349	67004-0212							
224	12-1/2	14-1/2	319	368	67004-0224							
236	13-1/4	15-1/4	338	387	67004-0236							
248	1-3/4	16	44	406	67004-0248							
270	15-1/4	17-1/2	392	441	67004-0270							
312	18	20	459	508	67004-0312							
332	19-1/4	21-1/4	491	540	67004-0332							
390	14-1/2	25	371	636	67004-0390							
502	28	32	711	812	67004-0502							
538	24-3/4	34-1/4	628	869	67004-0538							
569	32	36-1/4	810	819	67004-0569							

Additional sizes available



9/16" Hy-Gear clamps have a wide range of applications, from simple home and auto repair to heavy industrial. The bands have clean punched rectangular perforations that hold strong and connect easily.

	BEST	Hy-Gear Ideal-Tridon 63-4	<p>5/16" Hex Head</p>  <p>300 Stainless</p>	<p>UPC Shield</p>  <p>300 Stainless</p>	<p>9/16" Band Width</p>  <p>300 Stainless</p>			
		BETTER	Hy-Gear Ideal-Tridon 68-0	<p>5/16" Hex Head</p>  <p>410 Stainless</p>	<p>Housing</p>  <p>200 Stainless</p>	<p>9/16" Band Width</p>  <p>200 Stainless</p>		
			GOOD	Hy-Gear Ideal-Tridon 50-0 • Tridon 150	<p>5/16" Hex Head</p>  <p>Plated Carbon Steel</p>	<p>Housing</p>  <p>200 Stainless</p>	<p>9/16" Band Width</p>  <p>200 Stainless</p>	
				SPECIALTY	Hy-Gear Ideal-Tridon 64-0	<p>3/8" Hex Head</p>  <p>410 Stainless</p>	<p>Housing</p>  <p>200 Stainless</p>	<p>9/16" Band Width</p>  <p>200 Stainless</p>




35 in-lbs (4 Nm) for most applications

FIND YOUR PART NUMBER

Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 63-4	Ideal-Tridon 68-0	Ideal-Tridon 50-0	Tridon 150	Ideal-Tridon 64-0
6	3/8	7/8	10	22	63004-0006	68060	50060	-	64060
8	7/16	1	11	25	63004-0008	68080	50080	-	64080
10	1/2	1-1/16	13	27	63004-0010	68100	50100	150-010	64100
12	1/2	1-1/4	13	32	63004-0012	68120	50120	150-012	64120
16	11/16	1-1/2	18	38	63004-0016	68160	50160	150-016	64160
20	3/4	1-3/4	19	44	63004-0020	68200	50200	150-020	64200
24	1	2	25	51	63004-0024	68240	50240	150-024	64240
28	1-1/4	2-1/4	32	57	63004-0028	68280	50280	150-028	64280
32	1-1/2	2-1/2	38	63	63004-0032	68320	50320	150-032	64320
36	3/4	2-3/4	19	70	63004-0036	68360	50360	150-036	64360
40	1	3	26	76	63004-0040	68400	50400	150-040	64400
44	1-1/4	3-1/4	32	83	63004-0044	68440	50440	150-044	64440
48	1-1/2	3-1/2	38	89	63004-0048	68480	50480	150-048	64480
52	1-3/4	3-3/4	44	95	63004-0052	68520	50520	150-052	64520
56	3	4	51	101	63004-0056	68560	50560	150-056	64560
60	2-1/4	4-1/4	57	108	63004-0060	68600	50600	150-060	64600
64	2-1/2	4-1/2	64	114	63004-0064	68640	50640	150-064	64640
72	3	5	76	127	63004-0072	68720	50720	150-072	64720
80	3-1/2	5-1/2	89	140	63004-0080	68800	50800	150-080	64800
88	4	6	102	152	63004-0088	68880	50880	150-088	64880
96	4-1/2	6-1/2	114	165	63004-0096	68960	50960	150-096	64960
104	5	7	127	178	63004-0104	68104	50104	150-104	64104
116	5-1/2	8-1/2	146	197	63004-0116				
128	7-1/4	9-1/4	64	216	63004-0128				
140	7-1/4	9-1/4	64	235	63004-0140				
152	2	10	64	254	63004-0152				
164	2	10-3/4	64	273	63004-0164				
176	9-1/2	11-1/2	64	292	63004-0176				
188	2	12-1/2	64	311	63004-0188				
208	11-1/2	13-1/2	64	343	63004-0208				
224	12-1/2	14-1/2	64	368	63004-0224				
236	13-1/4	15-1/4	64	387	63004-0236				
248	2	16	64	406	63004-0248				
260	2	16-3/4	64	425	63004-0260				
272	3-1/4	17-1/2	64	445	63004-0272				
312	2-1/2	20	64	508	63004-0312				
380	2-1/2	24-1/4	64	616	63004-0380				
760	2-1/2	48	64	1219	63004-0760				

Additional sizes available

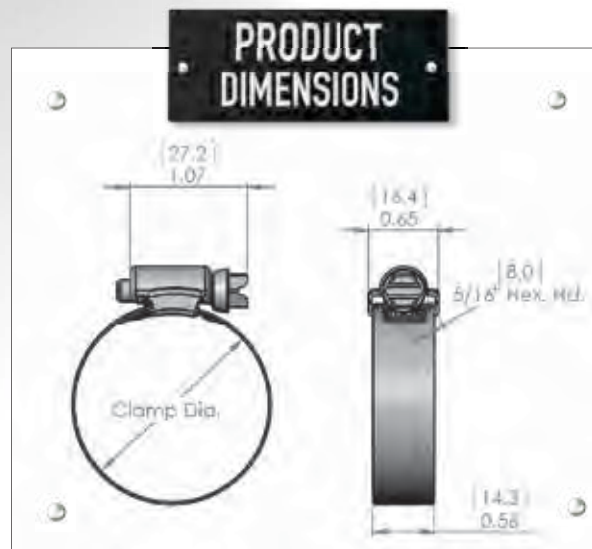

NON-PERFORATED

Non-Perforated clamps are based on our popular general purpose worm gear clamps, but are engineered to prevent hose damage during installation. The non-perforated band keeps soft silicone hoses from shearing or extruding during installation and final torquing, maintaining the integrity of the connection, and providing a more stable seal. Plus, IDEAL-TRIDON Non-Perforated clamps are available in several material configurations making them perfect for automotive, marine and many industrial applications. Better yet, they act and perform just like traditional worm gear clamps, fitting into restricted spaces and holding tightly over time. Consider IDEAL-TRIDON Non-Perforated worm gear clamps for your next application, and get the assurance of damage-free clamping technology to keep your connection secure.

WIDE CROSS SADDLE
Wide cross saddle provides a more even support structure upon installation and longer term band tension.




**MEETS OR EXCEEDS
DIN 3017 STANDARD**

MATERIAL SPECIFICATIONS AND CLAMPING RANGES




Material specifications and clamping ranges are stamped on clamp band for easy identification and proper application fitment. (See chart on right)

SMOOTH INSIDE BAND


Smooth inside band protects soft hoses against shearing and fray, extending service life.




9 mm Band




7 mm Hex Head	Housing	9 mm Band Width
		

For material composition please see chart on right.


 17 in-lbs (2 Nm) for sizes 016 and below
26 in-lbs (3 Nm) for sizes 018 and up



12 mm Band

7 mm Hex Head	Housing	12 mm Band Width
		

For material composition please see chart on right.

 44 in-lbs (5 Nm) for most applications

FIND YOUR PART NUMBER


Band Width	Min (in)	Max (in)	Min (mm)	Max (mm)	W2 Ideal-Tridon	W2 Tridon	W3 Ideal-Tridon	W3 Tridon	W4 Ideal-Tridon	W4 Tridon	W5 Ideal-Tridon	W5 Tridon
9 mm	5/16	15/32	8	12	53302-0012	53312-0012	53303-0012	53313-0012	53304-0012	53314-0012	53305-0012	53315-0012
	5/16	5/8	8	16	53302-0016	53312-0016	53303-0016	53313-0016	53304-0016	53314-0016	53305-0016	53315-0016
	15/32	25/32	12	20	53302-0020	53312-0020	53303-0020	53313-0020	53304-0020	53314-0020	53305-0020	53315-0020
	15/32	7/8	12	22	53302-0022	53312-0022	53303-0022	53313-0022	53304-0022	53314-0022	53305-0022	53315-0022
	5/8	1-1/16	16	27	53302-0027	53312-0027	53303-0027	53313-0027	53304-0027	53314-0027	53305-0027	53315-0027
	25/32	1-1/4	20	32	53302-0032	53312-0032	53303-0032	53313-0032	53304-0032	53314-0032	53305-0032	53315-0032
	29/32	1-3/8	23	35	53302-0035	53312-0035	53303-0035	53313-0035	53304-0035	53314-0035	53305-0035	53315-0035
	1	1-9/16	25	40	53302-0040	53312-0040	53303-0040	53313-0040	53304-0040	53314-0040	53305-0040	53315-0040
	1-3/16	1-3/4	30	45	53302-0045	53312-0045	53303-0045	53313-0045	53304-0045	53314-0045	53305-0045	53315-0045
	1-1/4	1-31/32	32	50	53302-0050	53312-0050	53303-0050	53313-0050	53304-0050	53314-0050	53305-0050	53315-0050
	1-9/16	2-3/8	40	60	53302-0060	53312-0060	53303-0060	53313-0060	53304-0060	53314-0060	53305-0060	53315-0060
	1-31/32	2-3/4	50	70	53302-0070	53312-0070	53303-0070	53313-0070	53304-0070	53314-0070	53305-0070	53315-0070
	2-3/8	3-1/8	60	80	53302-0080	53312-0080	53303-0080	53313-0080	53304-0080	53314-0080	53305-0080	53315-0080
	2-3/4	3-1/2	70	90	53302-0090	53312-0090	53303-0090	53313-0090	53304-0090	53314-0090	53305-0090	53315-0090
	3-1/8	3-15/16	80	100	53302-0100	53312-0100	53303-0100	53313-0100	53304-0100	53314-0100	53305-0100	53315-0100
	3-1/2	4-5/16	90	110	53302-0110	53312-0110	53303-0110	53313-0110	53304-0110	53314-0110	53305-0110	53315-0110
	3-15/16	4-23/32	100	120	53302-0120	53312-0120	53303-0120	53313-0120	53304-0120	53314-0120	53305-0120	53315-0120
	4-5/16	5-1/8	110	130	53302-0130	53312-0130	53303-0130	53313-0130	53304-0130	53314-0130	53305-0130	53315-0130
	4-23/32	5-1/2	120	140	53302-0140	53312-0140	53303-0140	53313-0140	53304-0140	53314-0140	53305-0140	53315-0140
	5-1/8	5-29/32	130	150	53302-0150	53312-0150	53303-0150	53313-0150	53304-0150	53314-0150	53305-0150	53315-0150
5-1/2	6-5/16	140	160	53302-0160	53312-0160	53303-0160	53313-0160	53304-0160	53314-0160	53305-0160	53315-0160	
12 mm	5/8	1-1/16	16	27	53402-0027	53412-0027	53403-0027	53413-0027	53404-0027	53414-0027	53405-0027	53415-0027
	25/32	1-1/4	20	32	53402-0032	53412-0032	53403-0032	53413-0032	53404-0032	53414-0032	53405-0032	53415-0032
	1	1-9/16	25	40	53402-0040	53412-0040	53403-0040	53413-0040	53404-0040	53414-0040	53405-0040	53415-0040
	1-3/16	1-3/4	30	45	53402-0045	53412-0045	53403-0045	53413-0045	53404-0045	53414-0045	53405-0045	53415-0045
	1-1/4	1-31/32	32	50	53402-0050	53412-0050	53403-0050	53413-0050	53404-0050	53414-0050	53405-0050	53415-0050
	1-9/16	2-3/8	40	60	53402-0060	53412-0060	53403-0060	53413-0060	53404-0060	53414-0060	53405-0060	53415-0060
	1-31/32	2-3/4	50	70	53402-0070	53412-0070	53403-0070	53413-0070	53404-0070	53414-0070	53405-0070	53415-0070
	2-3/16	2-15/16	55	75	53402-0075	53412-0075	53403-0075	53413-0075	53404-0075	53414-0075	53405-0075	53415-0075
	2-3/8	3-1/8	60	80	53402-0080	53412-0080	53403-0080	53413-0080	53404-0080	53414-0080	53405-0080	53415-0080
	2-3/4	3-1/2	70	90	53402-0090	53412-0090	53403-0090	53413-0090	53404-0090	53414-0090	53405-0090	53415-0090
	3-1/8	3-15/16	80	100	53402-0100	53412-0100	53403-0100	53413-0100	53404-0100	53414-0100	53405-0100	53415-0100
	3-1/2	4-5/16	90	110	53402-0110	53412-0110	53403-0110	53413-0110	53404-0110	53414-0110	53405-0110	53415-0110
	3-15/16	4-23/32	100	120	53402-0120	53412-0120	53403-0120	53413-0120	53404-0120	53414-0120	53405-0120	53415-0120
	4-5/16	5-1/8	110	130	53402-0130	53412-0130	53403-0130	53413-0130	53404-0130	53414-0130	53405-0130	53415-0130
	4-23/32	5-1/2	120	140	53402-0140	53412-0140	53403-0140	53413-0140	53404-0140	53414-0140	53405-0140	53415-0140
	5-1/8	5-29/32	130	150	53402-0150	53412-0150	53403-0150	53413-0150	53404-0150	53414-0150	53405-0150	53415-0150
	5-1/2	6-5/16	140	160	53402-0160	53412-0160	53403-0160	53413-0160	53404-0160	53414-0160	53405-0160	53415-0160
	5-29/32	6-11/16	150	170	53402-0170	53412-0170	53403-0170	53413-0170	53404-0170	53414-0170	53405-0170	53415-0170
	6-5/16	7-3/32	160	180	53402-0180	53412-0180	53403-0180	53413-0180	53404-0180	-	53405-0180	-
	6-11/16	7-15/32	170	190	-	53412-0190	-	53413-0190	-	-	53405-0190	-
7-3/32	7-7/8	180	200	-	53412-0200	-	53413-0200	-	-	53405-0200	-	

WHICH CLAMP IS RIGHT FOR ME?




	Corrosion Resistance	Material Composition	Common Uses
W2	Average Requirements	430 Band & Housing Plated Carbon Steel Screw	Automotive - Truck Replacements - Industrial Applications
W3	Medium Requirements	All 430 Stainless Steel	Automotive OE - Industrial Applications
W4	High Requirements Low Magnetic Permeability	All 304 Stainless Steel	Critical Connections in Cars such as Petrol Pipes - Close to Critical & Electronic Circuits Top Grade Mechanical Engineering - Agricultural Machinery - Motorbikes - Signs General Outdoors - Stainless Steel Chimneys
W5	Maximum Requirements Salt Water Resistant Low Magnetic Permeability	All 316 Stainless Steel	Close to Critical & Electronic Circuits - Shipbuilding - Defense Technology - Food Processing Sewage Treatment Facilities - Chemical & Mechanical Engineering


COMBO HEX® & MILITARY WORM DRIVE

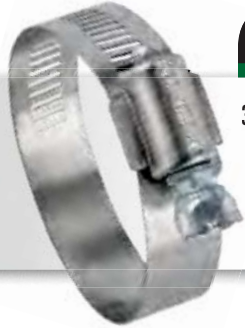Combo-Hex clamps are the clamps professional mechanics choose most often. Particularly helpful in hard-to-reach areas, they feature an exclusive, safety-collared, deep-slotted screw design that prevents screwdrivers from slipping and puncturing the hose wall. Combo-Hex clamps can be installed with a screwdriver, nutdriver or socket wrench.




Combo Hex Ideal-Tridon 54-0




3/8" Safety-Collared Hex • Deep-Slotted	Housing	9/16" Band Width
		
Plated Carbon Steel	200 Stainless	200 Stainless

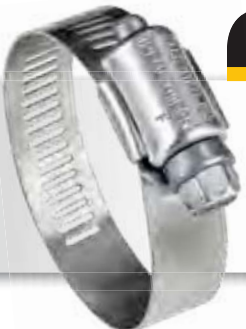

35 in-lbs (4 Nm) for most applications

Military Worm Drive clamps are manufactured to military specification MS-35842 and AA-52506C.



Military Worm Drive Ideal-Tridon 632 • Tridon 632

5/16" Hex Head	Housing	1/2" Band Width
		
410 Stainless	201 Stainless	201 Stainless


35 in-lbs (4 Nm) for most applications

FIND YOUR PART NUMBER						
Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 54-0	Ideal-Tridon 632 Tridon 632
6	3/8	7/8	10	22	54060	632-006
8	7/16	1	11	25	54080	-
10	1/2	1-1/16	13	27	54100	-
12	1/2	1-1/4	13	32	54120	632-012
16	11/16	1-1/2	18	38	54160	-
20	3/4	1-3/4	19	44	54200	-
24	1	2	25	51	54240	632-024
28	1-1/4	2-1/4	32	57	54280	-
32	1-1/2	2-1/2	38	63	54320	-
36	1-3/4	2-3/4	44	70	54360	632-036
40	2	3	51	76	54400	-
44	2-1/4	3-1/4	57	82	54440	-
48	2-1/2	3-1/2	64	89	54480	632-048
52	1-7/8	3-3/4	48	95	54520	-
56	2-1/8	4	54	101	54560	-
60	3-5/16	4-1/4	84	108	-	632-060
104	4	7	102	178	-	632-104*

*Non-stocking item

SURELOCK QUICK ENGAGE

Surelock Quick Engage worm drive clamps have a bind-free, pull-through design for fast installation. Captured screw design for quick fastening and trouble-free tensioning. Extended housing engages 25% more screw threads than competitive designs.



Surelock Ideal-Tridon 48

5/16" Hex Head



305 Stainless

Two-Piece



304 Stainless

9/16" Band Width



304 Stainless



Surelock Ideal-Tridon 49

5/16" Hex Head



316 Stainless

Two-Piece



316 Stainless

9/16" Band Width



316 Stainless



40 in-lbs (4.5 Nm) for most applications

FIND YOUR PART NUMBER

Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 48	Ideal-Tridon 49
12	1/2	1-1/4	13	32	48012	-
20	3/4	1-3/4	19	44	48020	-
24	3/4	2	19	51	48024	-
28	1	2-1/4	25	57	48028	-
32	1-1/4	2-1/2	32	64	48032	49032
36	7/8	2-3/4	22	70	48036	-
48	1	3-1/2	25	89	48048	-
56	1	4	25	102	48056	-
72	2	5	51	127	48072	49073
80	1-13/16	5-1/2	48	140	48080	49080
88	2	6	51	152	48088	-
104	2	7	51	178	48104	49104
116	1-3/4	7-3/4	44	196	48116	-
128	4-1/4	8-1/2	108	216	48128	49128
152	4	10	102	254	48152	-
180	7-3/4	11-3/4	197	298	48180	49180
188	6-1/4	12-1/4	159	311	48188	-
190	6-3/8	12-3/8	162	314	48190	49190
218	11-3/16	14-5/16	284	359	48218	49218
224	8-1/2	14-1/2	216	368	48224	-
232	9	15	229	381	48232	-
242	12-11/16	15-5/8	323	397	48242	49242
248	2-1/2	16	63	406	48248	-
258	13-11/16	16-5/8	348	422	48258	49258
272	11-1/2	17-1/2	292	445	48272	-
282	15-3/16	18-1/8	386	460	48282	49282
288	12-1/2	18-1/2	318	470	48288	-
306	14-1/16	19-5/8	357	498	48306	49306
312	2-3/8	20	60	508	48312	-

Surelock 48: Sizes available up to size 598. Sizes 80 and above are shipped flat and disengaged • Surelock 49: All sizes are shipped flat and disengaged.

SNAPLOCK® QUICK RELEASE

Snaplock Quick Release worm drive clamps are good for closed system applications where the clamp must be disengaged to be applied. The swivel-action locking of screw to band makes installation and removal much faster. All Snaplock housings are 200 stainless steel.

Snaplock Ideal-Tridon 56-0



5/16" Hex Head



Plated Carbon Steel

Bridge



Plated Carbon Steel

9/16" Band Width



200 Stainless

Snaplock Ideal-Tridon 500 • Tridon 500/LS

5/16" Hex Head



Plated Carbon Steel

Bridge



410 Stainless

1/2" Band Width



200 Stainless

Snaplock Ideal-Tridon 58-0 • Tridon 58-0/LAS



3/8" Hex Head



410 Stainless

Bridge



410 Stainless

9/16" Band Width



200 Stainless

Snaplock Ideal-Tridon 550 • Tridon 550/LSS

5/16" Hex Head



410 Stainless

Bridge



410 Stainless

1/2" Band Width



301 Stainless




30 in-lbs (3.4 Nm) for most applications


FIND YOUR PART NUMBER


Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 56-0	Ideal-Tridon 500 Tridon 500/LS	Ideal-Tridon 58-0 Tridon 58-0/LAS	Ideal-Tridon 550 Tridon 550/LSS
12	1/2	1-1/4	13	32	56120	500-012	5812	-
20	3/4	1-3/4	19	44	56200	500-020	5820	550-020
24	1-1/16	2	27	51	56240	-	5824	-
28	1	2-1/4	25	57	56280	-	5828	550-028
32	1-9/16	2-1/2	40	64	-	500-032	-	550-032
36	1	2-3/4	25	70	56360	500-036	5836	550-036
48	1-1/2	3-1/2	39	89	56480	500-048	5848	550-048
56	1	4	25	102	56560	500-056	5856	550-056
72	2	5	51	127	56720	500-072	5872	550-072
88	2	6	51	152	56880	500-088	5888	550-088
96	3-1/2	6-1/2	89	167	-	500-096	-	550-096
104	2-7/8	7	45	178	56104	500-104	58104	550-104
116	1-3/4	7-3/4	45	197	56116	500-116	58116	550-116
128	1-3/4	8-1/2	45	216	56128	500-128	58128	550-128
136	1-3/4	9	45	228	56136	-	-	550-136
152	2	10	51	254	56152	500-152	58152	550-152
188	2	12-1/4	51	311	56188	500-188	58188	550-188
216	10-3/16	14	259	356	-	500-216	-	550-216
224	2-1/2	14-1/4	64	362	-	-	58224	550-224
232	13-1/8	15	333	381	56232	500-232	-	-
248	1-3/4	16	44	406	-	500-248	-	550-248
258	1-15/16	16-5/8	50	422	56258	500-258	-	-
272	2	17	52	432	56272	-	-	-
280	14-1/4	18	362	457	-	500-280	-	550-280
288	1-13/16	18-1/2	45	470	56288	-	-	-
294	1-7/8	18-3/4	48	479	-	500-294	-	-
312	1-7/8	20	48	508	-	500-312	-	550-312
332	2	21-1/4	51	540	56332	-	58332	-
344	1-3/4	22	44	559	-	500-344	-	550-344
390	18-5/8	25	473	635	-	-	-	550-390

Wraplock clamps, with their unique plated carbon steel buckles, conform to many shapes and are suitable for specialized applications.



Wraplock Ideal-Tridon 59-0


5/16" Hex Head

 Plated Carbon Steel

1/2" Band Width

 Galvanized Steel


FIND YOUR PART NUMBER


Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Band Length (in)	Band Length (mm)	Ideal-Tridon 59-0
12	1	3-1/2	25	89	12	305	5912
15	1	4-1/2	25	114	15	381	5915
18	1	5	25	127	18	457	5918
24	1	7	25	178	24	610	5924
30	1	9	25	229	30	762	5930
48	1	14-1/2	25	368	48	1219	5948


Lox-On clamps are for extra-tough installations. The unique design provides double-locking security with a 301 stainless steel buckle and high band tension for high sealing pressures.



Lox-On Ideal-Tridon 69-0

5/16" Hex Head

 305 Stainless

Housing

 305 Stainless


1/2" Band Width

 301 Stainless • UPC Shield

FIND YOUR PART NUMBER




Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Band Length (in)	Band Length (mm)	Ideal-Tridon 69-0
12	11/16	1-1/4	17	32	4-13/16	122	69120
20	11/16	1-3/4	17	44	6-13/32	163	69200
32	11/16	2-5/8	17	67	8-29/32	226	69320
72	1-3/4	5	44	127	16-5/16	414	69720
104	4	7-1/4	102	184	23-5/16	592	69104

TURN-KEY® & FLEXIBLE HOSE CLAMP DRIVER

Turn-Key clamps offer innovative design and install with a simple hand twist. No tools are required. Remove the reusable plastic screw cap for a tamper-resistant connection. Also available in Visi-Pak Assortment options.



Turn-Key Ideal-Tridon 5Y/6Y

		
Capped Screw Plated Carbon Steel	Housing 300 Stainless	1/2" Band Width 200 Stainless


FIND YOUR PART NUMBER



Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 5Y/6Y	Ideal-Tridon Visi-Paks
4	1/4	5/8	6	16	6Y004	‡
6	3/8	7/8	10	22	6Y006	‡
12	1/2	1-1/4	13	32	5Y012	5Y012V*
20	3/4	1-3/4	19	44	5Y020	5Y020V*
28	1-1/4	2-1/4	32	57	5Y028	5Y028V*
36	1-3/4	2-3/4	44	70	5Y036	5Y036V*
48	2-1/2	3-1/2	64	89	5Y048	5Y048V*
64	2-1/2	4-1/2	64	114	5Y064	5Y064V*
‡Micro Assortment: Two each of size 4 and size 6						6Y004V
Six-Pack Assortment: One each of size 4, 6, 12, 20, 28, 36						5Y001V

*Comes with 2 clamps per Visi-Pak

Flexible Hose Clamp Driver Stop using that old, rigid nut driver and add some flexibility to your work! The flexible shaft and slipeless grip provide 90-degree work access and are best in tight spaces such as compact car and boat engines, as well as plumbing repair applications. The socket fits mini and standard hose clamp screw heads. Just flip the socket for the desired size of 1/4" or 5/16" hex. **Part No. 9999V**

Flexible Hose Clamp Driver Part No. 9999V



	— or —	
1/4" Hex Head		5/16" Hex Head

Lined clamps are designed for use with silicone rubber and other soft hose applications. The liner protects the hose surface and prevents it from extruding or shearing through the band notches as the clamp is tightened.

Lined Ideal-Tridon 65E



5/16" Hex Slotted



300 Stainless

Housing



300 Stainless

9/16" Lined Band



300 Stainless

Lined Ideal-Tridon 615 • Tridon 615



5/16" Hex Slotted



300 Stainless

Housing



200 Stainless

1/2" Lined Band



200 Stainless

Lined Ideal-Tridon 53-0 • Tridon 613/ET



5/16" Hex Slotted



Plated Carbon Steel

Housing



200 Stainless

1/2" Lined Band



200 Stainless

Lined Ideal-Tridon 67M



5/16" Hex Slotted



316 Stainless

Housing



316 Stainless

1/2" Lined Band




316 Stainless



35 in-lbs (4 Nm) for most applications

FIND YOUR PART NUMBER

Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 65E	Ideal-Tridon 615 Tridon 615	Ideal-Tridon 53-0	Tridon 613/ET	Ideal-Tridon 67M
6	1/2	7/8	13	22	6506E	615-006	53060	613-006	N/A
8	5/8	1	16	25	6508E	615-008	53080	613-008	6708M
10	11/16	1-1/16	17	27	6510E	615-010	53100	613-010	6710M
12	11/16	1-1/4	17	32	6512E	615-012	53120	613-012	6712M
16	3/4	1-1/2	19	38	6516E	615-016	53160	613-016	6716M
20	1	1-3/4	25	44	6520E	615-020	53200	613-020	6720M
24	1-1/16	2	27	51	6524E	615-024	53240	613-024	6724M
28	1-5/16	2-1/4	34	57	6528E	615-028	53280	613-028	6728M
32	1-9/16	2-1/2	40	64	6532E	615-032	53320	613-032	6732M
36	1-13/16	2-3/4	46	70	6536E	615-036	53360	613-036	6736M
40	2-1/16	3	52	76	6540E	615-040	53400	613-040	6740M
44	2-5/16	3-1/4	59	82	6544E	615-044	53440	613-044	6744M
48	2-9/16	3-1/2	65	89	6548E	615-048	53480	613-048	6748M
52	2-13/16	3-3/4	72	95	6552E	615-052	53520	613-052	6752M
56	3-1/16	4	78	100	6556E	615-056	53560	613-056	6756M
60	3-9/16	4-1/4	84	108	6560E	615-060	53600	613-060	6760M
64	3-9/16	4-1/2	91	114	6564E	615-064	53640	613-064	6764M
72	4-1/16	5	103	127	6572E	615-072	53720	613-072	6772M
80	4-9/16	5-1/2	116	140	-	615-080	-	-	-
88	5	6	128	152	-	-	-	-	6788M
96	5-1/2	6-1/2	141	165	-	-	-	-	6796M

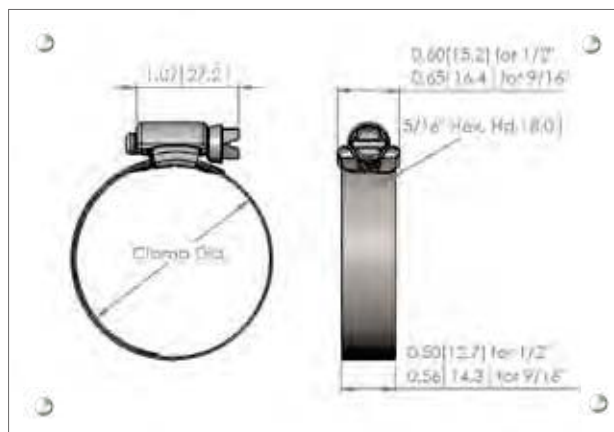

Pow'r-Gear high performance clamps are designed for high vibration and stubborn leakage applications such as industrial machinery, heavy truck, farm and off-road equipment engines. Pow'r-Gears feature an extra wide 5/8" heavy gauge band and a wide profile housing that provides maximum engagement of screw threads to band. Engineered to deliver exceptionally high rates of band tension to handle the toughest sealing jobs.

Pow'r-Gear Ideal-Tridon 60 • Tridon M850



5/16" Hex Head  410 Stainless	Housing  300 Stainless	5/8" Band Width  300 Stainless
--	---	---

Pow'r-Gear Ideal-Tridon 6P



5/16" Hex Head  305 Stainless	Housing  300 Stainless	5/8" Band Width  300 Stainless
--	---	---

Pow'r-Gear Ideal-Tridon 6L • Tridon M843



5/16" Hex Head  410 Stainless	Housing  300 Stainless	5/8" Lined Band  300 Stainless
--	---	---

Pow'r-Gear Ideal-Tridon 6M



5/16" Hex Head  305 Stainless	Housing  300 Stainless	5/8" Lined Band  300 Stainless
--	---	---

Pow'r-Gear Ideal-Tridon 6X



5/16" Hex Head  410 Stainless	Housing  300 Stainless	5/8" Band Width  300 Stainless
--	---	---



75-90 in-lbs (8.5-10 Nm) for most applications

FIND YOUR PART NUMBER

Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 60	Tridon M850	Ideal-Tridon 6P	Ideal-Tridon 6L	Tridon M843	Ideal-Tridon 6M
175	1	1-3/4	25	45	60175	850-175	6P175	6L175	843-175	6M175
212	1-1/4	2-1/8	32	54	60200	850-200	6P200	6L200	843-200	6M200
262	1-3/4	2-5/8	45	66	60250	850-250	6P250	6L250	843-250	6M250
312	2-1/4	3-1/8	57	79	60300	850-300	6P300	6L300	843-300	6M300
362	2-3/4	3-5/8	70	92	60350	850-350	6P350	6L350	843-350	6M350
412	3-1/4	4-1/8	83	105	60400	850-400	6P400	6L400	843-400	6M400
462	3-3/4	4-5/8	95	117	60450	850-450	6P450	6L450	843-450	6M450
512	4-1/4	5-1/8	108	130	60500	850-500	6P500	6L500	843-500	6M500
562	4-3/4	5-5/8	121	143	60550	850-550	6P550	6L550	843-550	6M550
612	5-1/4	6-1/8	133	155	60600	850-600	6P600	6L600	843-600	6M600
662	5-3/4	6-5/8	146	168	60650	850-650	6P650	6L650	843-650	6M650
712	6-1/4	7-1/8	159	181	60700	850-700	6P700	6L700	843-700	6M700
762	6-3/4	7-5/8	172	193	60750	850-750	6P750	6L750	843-750	6M750
812	7-1/4	8-1/8	184	206	60800	850-800	6P800	6L800	843-800	6M800
862	7-3/4	8-5/8	197	219	60850	850-850	6P850	6L850	843-850	6M850
912	8-1/4	9-1/8	210	232	60900	850-900	6P900	6L900	843-900	6M900

Did you know...

Pow'r-Gear 6X Series clamps have extra band notches for greater work range so five sizes cover clamping diameters from 1-1/4" to 10-1/8". This minimizes your inventory without compromising applications coverage. Plus, Pow'r-Gear clamps deliver over 800 lbs. of band tension at 150 in.-lbs. of torque. That's over twice the holding power of conventional clamps!

FIND YOUR PART NUMBER

Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 6X
262	1-1/4	2-5/8	32	66	6X200
412	2	4-1/8	51	104	6X300
612	4	6-1/8	102	155	6X400
912	6	9-1/8	153	231	6X500
1012	7	10-1/8	178	257	6X600






Additional sizes available

T-BOLTS

T-Bolt clamps provide uniform sealing pressure for a positive, reliable seal. Designed for use in high vibration and large diameter applications common in heavy trucks, industrial machinery, off-road equipment, agricultural irrigation and machinery. Features a 3/4" or 7/8" wide stainless steel band, depending upon size ordered, and welded construction for reliability.

Standard T-Bolt Ideal-Tridon 30010



1/4" T-Bolt  Plated Carbon Steel	7/16" Hex Nut  Plated Carbon Steel Nylon Insert	3/4" Band  300 Stainless	3/4" Bridge  300 Stainless	Trunnion  Plated Carbon Steel
---	---	---	---	--

Standard T-Bolt Ideal-Tridon 30011

1/4" T-Bolt  300 Stainless	7/16" Hex Nut  300 Stainless Nylon Insert	3/4" Band  300 Stainless	3/4" Bridge  300 Stainless	Trunnion  300 Stainless
---	---	---	---	--

Channel Bridge T-Bolt Ideal-Tridon 30020



1/4" T-Bolt  Plated Carbon Steel	7/16" Hex Nut  Plated Carbon Steel Nylon Insert	3/4" Band  300 Stainless	3/4" Bridge  300 Stainless	Trunnion  Plated Carbon Steel
---	---	---	---	--

Channel Bridge T-Bolt Ideal-Tridon 30021

1/4" T-Bolt  300 Stainless	7/16" Hex Nut  300 Stainless Nylon Insert	3/4" Band  300 Stainless	3/4" Bridge  300 Stainless	Trunnion  300 Stainless
---	---	---	---	--

Note: 7/8" wide bands and custom options by request



75 in-lbs (8.5 Nm) for most applications


FIND YOUR PART NUMBER

Size					Standard T-Bolt		Channel Bridge	
	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 30010	Ideal-Tridon 30011	Ideal-Tridon 30020	Ideal-Tridon 30021
138	1.38	1.57	35.1	39.9	30010-0138	30011-0138	30020-0138	30021-0138
150	1.50	1.69	38.1	42.9	30010-0150	30011-0150	30020-0150	30021-0150
163	1.63	1.88	41.3	47.8	30010-0163	30011-0163	30020-0163	30021-0163
175	1.75	2.00	44.5	50.8	30010-0175	30011-0175	30020-0175	30021-0175
188	1.88	2.19	47.6	55.6	30010-0188	30011-0188	30020-0188	30021-0188
200	2.00	2.31	50.8	58.7	30010-0200	30011-0200	30020-0200	30021-0200
213	2.13	2.44	54.1	62.0	30010-0213	30011-0213	30020-0213	30021-0213
225	2.25	2.56	57.2	65.0	30010-0225	30011-0225	30020-0225	30021-0225
238	2.38	2.69	60.3	68.3	30010-0238	30011-0238	30020-0238	30021-0238
250	2.50	2.81	63.5	71.4	30010-0250	30011-0250	30020-0250	30021-0250
263	2.63	2.94	66.7	74.7	30010-0263	30011-0263	30020-0263	30021-0263
275	2.75	3.06	69.9	77.7	30010-0275	30011-0275	30020-0275	30021-0275
288	2.88	3.19	73.0	81.0	30010-0288	30011-0288	30020-0288	30021-0288
300	3.00	3.31	76.2	84.1	30010-0300	30011-0300	30020-0300	30021-0300
313	3.13	3.44	79.4	87.4	30010-0313	30011-0313	30020-0313	30021-0313
325	3.25	3.56	82.6	90.4	30010-0325	30011-0325	30020-0325	30021-0325
338	3.38	3.69	85.7	93.7	30010-0338	30011-0338	30020-0338	30021-0338
350	3.50	3.81	88.9	96.8	30010-0350	30011-0350	30020-0350	30021-0350
363	3.63	3.94	92.1	100.1	30010-0363	30011-0363	30020-0363	30021-0363
375	3.75	4.06	95.3	103.1	30010-0375	30011-0375	30020-0375	30021-0375
400	4.00	4.31	101.6	109.5	30010-0400	30011-0400	30020-0400	30021-0400
425	4.25	4.56	108.0	115.8	30010-0425	30011-0425	30020-0425	30021-0425
450	4.50	4.81	114.3	122.2	30010-0450	30011-0450	30020-0450	30021-0450
475	4.75	5.06	120.7	128.5	30010-0475	30011-0475	30020-0475	30021-0475
500	5.00	5.31	127.0	134.9	30010-0500	30011-0500	30020-0500	30021-0500
525	5.25	5.56	133.4	141.2	30010-0525	30011-0525	30020-0525	30021-0525
550	5.50	5.81	139.7	147.6	30010-0550	30011-0550	30020-0550	30021-0550
575	5.75	6.06	146.1	153.9	30010-0575	30011-0575	30020-0575	30021-0575
600	6.00	6.31	152.4	160.3	30010-0600	30011-0600	30020-0600	30021-0600
625	6.25	6.56	158.8	166.6	30010-0625	30011-0625	30020-0625	30021-0625
650	6.50	6.81	165.1	173.0	30010-0650	30011-0650	30020-0650	30021-0650
675	6.75	7.06	171.5	179.3	30010-0675	30011-0675	30020-0675	30021-0675
700	7.00	7.31	177.8	185.7	30010-0700	30011-0700	30020-0700	30021-0700
725	7.25	7.56	184.2	192.0	30010-0725	30011-0725	30020-0725	30021-0725
750	7.50	7.81	190.5	198.4	30010-0750	30011-0750	30020-0750	30021-0750
775	7.75	8.06	196.9	204.7	30010-0775	30011-0775	30020-0775	30021-0775
800	8.00	8.31	203.2	211.1	30010-0800	30011-0800	30020-0800	30021-0800
825	8.25	8.56	209.6	217.4	30010-0825	30011-0825	30020-0825	30021-0825
850	8.50	8.81	215.9	223.8	30010-0850	30011-0850	30020-0850	30021-0850

Additional sizes available

SPRING LOADED T-BOLTS

Spring Loaded T-Bolt clamps provide uniform sealing pressure for a positive, reliable seal. Designed for use in high vibration and large diameter applications common in heavy trucks, industrial machinery, off-road equipment, agricultural irrigation and machinery. Features a spring-loaded t-bolt assembly, a 3/4" wide stainless steel band and welded construction for reliability.

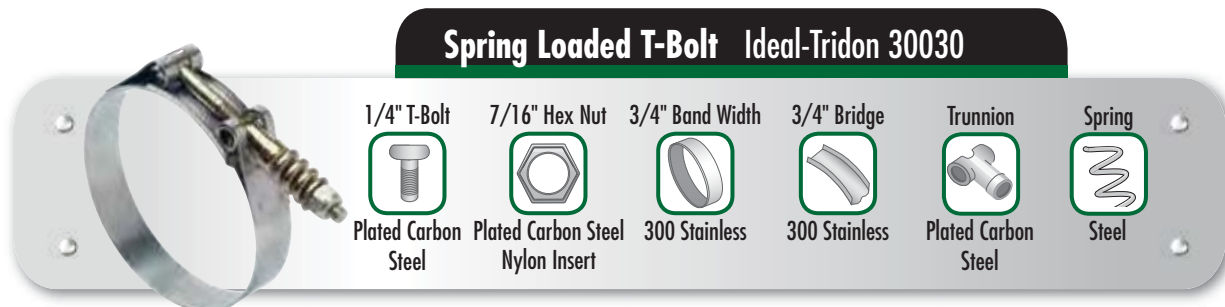

FIND YOUR PART NUMBER


Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 30030
225	2.250	2.563	57.2	65.1	30030-0225
275	2.750	3.063	69.9	77.8	30030-0275
300	3.000	3.313	76.2	84.1	30030-0300
306	3.063	3.375	77.8	85.7	30030-0306
313	3.125	3.438	79.4	87.3	30030-0313
325	3.250	3.563	82.6	90.5	30030-0325
338	3.375	3.688	85.7	93.7	30030-0338
350	3.500	3.813	88.9	96.8	30030-0350
356	3.563	3.875	90.5	98.4	30030-0356
363	3.625	3.938	92.1	100.0	30030-0363
375	3.750	4.063	95.3	103.2	30030-0375
400	4.000	4.313	101.6	109.5	30030-0400
406	4.063	4.375	103.2	111.1	30030-0406
425	4.250	4.563	108.0	115.9	30030-0425
450	4.500	4.813	114.3	122.2	30030-0450
456	4.563	4.875	115.9	123.8	30030-0456
475	4.750	5.063	120.7	128.6	30030-0475
500	5.000	5.313	127.0	134.9	30030-0500
506	5.063	5.375	128.6	136.5	30030-0506
525	5.250	5.563	133.4	141.3	30030-0525
550	5.500	5.813	139.7	147.6	30030-0550
575	5.750	6.063	146.1	154.0	30030-0575
625	6.250	6.563	158.8	166.7	30030-0625
650	6.500	6.813	165.1	173.0	30030-0650
750	7.500	7.813	190.5	198.4	30030-0750




75 in-lbs (8.5 Nm) for most applications

V-BANDS


V-Bands seal connections for flanged joints. Typical applications include filter housings, turbocharger systems, exhaust systems and industrial applications where a flanged connection is required. V-inserts can be manufactured to OE specifications and are made to order. Additional alloys are available for severe environments.




V-Band




1/4" T-Bolt
410 Stainless




7/16" Hex Nut
300 Stainless



Band with V-Insert
300 Stainless




Trunion
300 Stainless

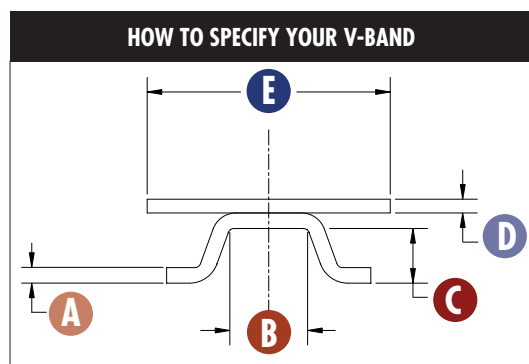


FIND YOUR PART NUMBER						
Nominal Dia. (in)	V-Insert			Band		Ideal-Tridon 24000
	A	B	C	D	E	
3.21	0.050	0.262	0.141	0.035	0.750	24000-0321
3.88	0.050	0.400	0.281	0.040	0.875	24000-0388
4.25	0.050	0.400	0.281	0.040	0.875	24000-0425
4.61	0.050	0.156	0.218	0.035	0.750	24000-0461
4.75	0.050	0.400	0.281	0.040	0.875	24000-0475
5.25	0.050	0.262	0.141	0.035	0.750	24000-0525
5.88	0.050	0.400	0.281	0.040	0.875	24000-0588


Specialty V-Bands for specific OE applications are available, such as the Univee and the Clam Shell. For information on how we can custom engineer a product for your specific application, contact your IDEAL-TRIDON sales representative.




Univee V-Band




1/4" T-Bolt
420 Stainless




Band with V-Insert
300 Stainless




Trunion
300 Stainless



Clam Shell V-Band



M6 Carriage Bolt
300 Stainless



Band with V-Insert
300 Stainless



90 in-lbs (10.2 Nm) for most applications

Flex-Gear clamps use a Belleville spring design to eliminate “cold flow” leakage that adjusts with the hose and fitting to maintain constant tension on the connection, eliminating leak paths. Excellent choice for fluctuating temperature applications and thermal compensation. **Features and Benefits:** Belleville spring and clamp construction is built to respond to constant temperature fluctuations. The larger, heavier-gauge, precision-formed springs provide higher rates of band tension and adjustment for a more dependable seal. Inner liner protects against shearing of the hose surfaces.

Flex-Gear Ideal-Tridon 43



5/16" Hex Head



Plated Carbon Steel

Housing



300 Stainless

Spring



300 Stainless

9/16" Lined Band



300 Stainless

Flex-Gear Ideal-Tridon 47

5/16" Hex Head



410 Stainless

Housing



300 Stainless

Spring



300 Stainless

9/16" Lined Band



300 Stainless



50 in-lbs (5.6 Nm) for most applications

Flex-Gear HD Ideal-Tridon 41



3/8" Hex Head



Plated Carbon Steel

Housing



300 Stainless

Spring



300 Stainless

5/8" Lined Band



300 Stainless

Flex-Gear HD Ideal-Tridon 45

3/8" Hex Head



410 Stainless

Housing



300 Stainless

Spring



300 Stainless

5/8" Lined Band



300 Stainless



75 in-lbs (8.5 Nm) for most applications

FIND YOUR PART NUMBER

Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 43	Ideal-Tridon 47
10	9/16	1-1/16	14	27	43010	47010
12	5/8	1-1/4	16	32	43012	47012
16	13/16	1-1/2	21	38	43016	47016
20	13/16	1-3/4	20	44	43020	47020
24	1-1/16	2	27	51	43024	47024
28	1-5/16	2-1/4	33	57	43028	47028
32	1-9/16	2-1/2	40	63	43032	47032
36	1-13/16	2-3/4	46	70	43036	47036
40	2-1/16	3	52	76	43040	47040
44	2-5/16	3-1/4	59	82	43044	47044
48	2-9/16	3-1/2	65	89	43048	47048

FIND YOUR PART NUMBER

Size	Min (in)	Max (in)	Min (mm)	Max (mm)	Ideal-Tridon 41	Ideal-Tridon 45
175	1	1-3/4	25	45	41175	45175
212	1-1/4	2-1/8	32	54	41200	45200
262	1-3/4	2-5/8	45	67	41250	45250
312	2-1/4	3-1/8	57	79	41300	45300
362	2-3/4	3-5/8	70	92	41350	45350
412	3-1/4	4-1/8	83	105	41400	45400
462	3-3/4	4-5/8	95	117	41450	45450
512	4-1/4	5-1/8	108	130	41500	45500
562	4-3/4	5-5/8	121	143	41550	45550
612	5-1/4	6-1/8	133	155	41600	45600
662	5-3/4	6-5/8	146	168	41650	45650
712	6-1/4	7-1/8	159	181	41700	45700
762	6-3/4	7-5/8	172	193	41750	45750
812	7-1/4	8-1/8	184	206	41800	45800
862	7-3/4	8-5/8	197	219	41850	45850
912	8-1/4	9-1/8	210	232	41900	45900



Did you know...

IDEAL-TRIDON offers a next generation, lighter smart clamp that can be used instead of heavier Flex-Gear clamps? If weight savings and compact design are your key needs, review our lineup of SmartSeal clamps on page 8. SmartSeal clamps represent the pinnacle in joint sealing technology, and their ultra compact profile is perfect for high vibration and thermal cycling applications.

Catch the eye of your customers and clamp onto sales with exclusive IDEAL-TRIDON **Merchandisers and Packaging**. We offer a wide variety of storage and display options to get your clamp stock in front of customers. Like our ultra-compact **Clamp Racks**. Choose from two pre-assembled wire racks and display your clamps right on the counter. Or, attach the pegs and turn it into a shelf unit. However you choose, it all adds up to greater profits and easy stocking.

Clamp Onto Sales with Clamp Profit Centers

- IDEAL-TRIDON exclusive
- Eye-catching design with realistic band and housings
- Tough with sturdy metal construction and durable styrene signs
- Visible merchandise promotes efficient, organized stock control
- Pre-assembled
- Versatile—use for countertop display or peg board attachment



Large Clamp Rack

The Large Clamp Rack holds 250 of the most popular size clamps and comes in multiple assortment options.

24-1/8" H x 21-1/8" W x 6-13/16" D
Part No: **2674001**

Small Clamp Rack

The Small Clamp Rack holds 130 of the most popular size clamps and comes in multiple assortment options.

17-3/8" H x 16" W x 6-13/16" D
Part No: **2673001**

Assortment Options

67-4	67-1	57-0	68-0	50-0
				
5/16" Hex Head	5/16" Hex Head	5/16" Hex Head	5/16" Hex Head	5/16" Hex Head
				
300 Stainless	410 Stainless	Plated Carbon Steel	410 Stainless	Plated Carbon Steel
UPC Shield	Housing	Housing	Housing	Housing
				
300 Stainless	200 Stainless	200 Stainless	200 Stainless	200 Stainless
1/2" Band Width	1/2" Band Width	1/2" Band Width	9/16" Band Width	9/16" Band Width
				
300 Stainless	200 Stainless	200 Stainless	200 Stainless	200 Stainless
1/2" Hy-Gear	1/2" Hy-Gear	1/2" Hy-Gear	9/16" Hy-Gear	9/16" Hy-Gear

SIZES AND QUANTITIES PER PACKAGE

	Micro 4	Micro 6	Size 10	Size 12	Size 20	Size 28	Size 36
Small Clamp Rack + 250 Pieces	40	40	40	40	30	30	30
Large Clamp Rack + 450 Pieces	70	70	60	60	70	60	60
Large Clamp Rack + 600 Pieces	100	100	80	80	80	80	80

FIND YOUR PART NUMBER

	Small Clamp Rack Only: 2673001			Large Clamp Rack Only: 2674001			
	67-4	67-1	67-1 Barcoded	57-0	68-0	68-0 Barcoded	50-0
250 Pieces + Small Rack	99903-1674-051	99903-1671-051	99903-1671-053	99903-1570-051	99903-1680-051	99903-1680-053	99903-1500-051
450 Pieces + Large Rack	99903-2674-051	99903-2671-051	99903-2671-053	99903-2570-051	99903-2680-051	99903-2680-053	99903-2500-051
600 Pieces + Large Rack	99903-3674-051	99903-3671-051	99903-3671-053	99903-3570-051	99903-3680-051	99902-3680-053	99903-3500-051
250 Clamps Only	99902-1674-051	99902-1671-051	99902-1671-053	99902-1570-051	99902-1680-051	99902-1680-053	99902-1500-051
450 Clamps Only	99902-2674-051	99902-2671-051	99902-2671-053	99902-2570-051	99902-2680-051	99902-2680-053	99902-2500-051
600 Clamps Only	99902-3674-051	99902-3671-051	99902-3671-053	99902-3570-051	99902-3680-051	99902-3680-053	99902-3500-051

If you're looking for larger displays, we offer two sizes of IDEAL-TRIDON **Wing Stack Bins**. They're easy to set up and hold an even larger amount of product with pricing decals. We also offer attractive **counter racks, sub pack boxes, profit center kits, and blister packs** that clearly display the part number and size for easy stocking and part retrieval. We even have a handy **counter mat** that reminds customers of the importance of superior clamps.

Large Wing Stack • Size: 43" H x 24" W x 20" L

Includes

- 100 Resealable Bags of 10-Piece Assorted Stainless Steel Clamps
Clamping Range 1/4" to 2-3/4" (see chart below)
- 220 Size 20 Individually Barcoded Clamps
General Purpose - All Stainless Steel
- 48 2-Packs of Size 64 Turn-Key Clamps
Perfect Dryer Vent Clamp



FIND YOUR PART NUMBER

Large Wing Stack + Kit	99903-0584-042
Large Wing Stack Only	99901-0584-042
Kit with Clamps Only	99902-0584-042

QUANTITIES PER BAG

Qty	Size
2	4
1	6
3	12
3	20
1	36

Small Wing Stack • Size: 43" H x 20" W x 12" L

Includes

- 100 Resealable Bags of 10-Piece Assorted Stainless Steel Clamps
Clamping Range 1/4" to 2-3/4" (see chart above)



FIND YOUR PART NUMBER

Small Wing Stack + Bags	99903-0585-042
Small Wing Stack Only	99901-0585-042
Bags Only	99902-0585-042

SmartSeal™ Profit Center Kit

Includes

- **SmartSeal Clamp Rack:** holds 20 clamps and comes with header card and peg-board hooks
- **SmartSeal Clamps:** 40 clamps in four 10-packs in sizes 20, 28, 40, and 52
- **SmartSeal Counter Mat:** low-profile mat features a non-slip backing and scratch/chemical resistant laminate surface



12" H x 18" W
Part No: **99999-4372-051**



17" H x 6-3/4" W x 5" D
Part No: **2672001**

FIND YOUR PART NUMBER

SmartSeal Clamp Rack Only	2672001
SmartSeal Clamps Only	99902-4372-051
Counter Mat Only	99999-4372-051
SmartSeal Clamp Rack + Clamps	99903-4372-051
SmartSeal Profit Center Kit: Rack + Clamps + Counter Mat	99904-4372-051

Attractive Packaging



Blister Packaging



Polybags



Sub Pack Boxes

FIND YOUR HOSE ID

SAE Sizes	Worm Drive SAE Type "F" Clamps		Micro Worm Drive SAE Type "M" Clamps	
	Hose ID Min. (in)	Hose ID Max. (in)	Hose ID Min. (in)	Hose ID Max. (in)
4	N/A	N/A	1/8	5/16
5	N/A	N/A	1/8	3/8
6	5/16	3/8	1/4	7/16
8	5/16	1/2	5/16	1/2
10	3/8	5/8	5/16	5/8
12	3/8	3/4	5/8	3/4
16	3/4	7/8	5/8	1
20	3/4	1-1/8	1	1-1/4
24	7/8	1-3/8	1-1/4	1-1/2
28	1-1/4	1-5/8	1-1/2	1-3/4
30	N/A	N/A	1-5/8	1-7/8
32	1-1/2	1-7/8	1-3/4	2
36	1-3/4	2	2	2-1/4
40	2	2-1/4	N/A	N/A
44	2-1/4	2-1/2	2-1/4	2-3/4
48	2-1/2	2-3/4	2-1/2	3
52	2-3/4	3	N/A	N/A
56	3	3-1/2	N/A	N/A
60	3-1/4	3-3/4	N/A	N/A
64	2-1/2	4	N/A	N/A
72	3	4-1/2	N/A	N/A
80	3-1/2	5	N/A	N/A
88	4	5-1/2	N/A	N/A
96	4-1/2	6	N/A	N/A
104	5	6-1/2	N/A	N/A

Did you know...

The IDEAL-TRIDON line of clamps is one of the most comprehensive offerings in the industry. Our depth of sealing technologies allows us to create clamps for heavy duty, automotive, marine, industrial, general use, and military applications in a broad assortment of sizes, styles and materials. In fact, our clamp products are in use and trusted from the Arctic Circle to the Sahara Desert. That's why we say at IDEAL-TRIDON, we provide *"Proven Designs, Billions of Times."*

PRODUCT CROSS REFERENCE GUIDE


Product	Ideal-Tridon	Tridon	Product Description	NORMA Breeze RG Ray	Murray	Dixon	Catalog Page
Turn-Key®	5Y	-	1/2" Band, Consumer Product - No Tools Required	-	-	-	23
Pow'r-Gear®	6L	M843	5/8" Band, High Performance Lined All SS Worm Drive Clamps	HTM-L SP	-	-	26
Pow'r-Gear®	6M	-	5/8" Band, High Performance All 300 Marine Worm Drive Clamps	HTS-L	-	-	26
Pow'r-Gear®	6P	-	5/8" Band, High Performance All 300 Marine Worm Drive Clamps	HTM SP	-	-	26
Pow'r-Gear®	6X	-	5/8" Band, High Performance Wide Range All SS Worm Drive Clamps	HP	-	-	26
Pow'r-Gear®	60	M850	5/8" Band, High Performance All SS Worm Drive Clamps	HTM	-	-	26
Flex-Gear®	41	-	5/8" Band, Constant Tension Clamps	CT-L	-	-	32
Flex-Gear®	43	-	9/16" Band, Constant Tension Clamps	CT-92	-	-	32
Flex-Gear®	45	-	5/8" Band, Constant Tension Clamps	CT-LSS	-	-	32
Flex-Gear®	47	-	9/16" Band, Constant Tension Clamps	CT-94	-	-	32
Surelock	48	-	9/16" Band, Quick Engage Clamps, 300 SS Marine	600	-	-	19
Surelock	49	-	9/16" Band, Quick Engage Clamps, 316 SS Marine	616	-	-	19
9/16" Hy-Gear®	50-0	150	9/16" Band, Partial SS Clamps	100	-	1000	14
Lined	53-0	613/ET	1/2" Band, Lined Partial SS Clamps	92	48	HL	24
Combo-Hex®	54-0	-	9/16" Band, Special Hex Screw Clamps	-	-	-	18
Snaplock®	56-0	-	9/16" Band, Quick Release Clamps	-	-	LS	20
1/2" Hy-Gear®	57-0	611/HS	1/2" Band, General Purpose Clamps	62	H	HS	12
Snaplock®	58-0	58-0/LAS	9/16" Band, Quick Release Clamps	-	-	LSS	20
Wraplock®	59-0	-	1/2" Band, Specialty Clamps	-	-	-	22
9/16" Hy-Gear®	64-0	-	9/16" Band, Special Hex Screw Clamps	200	-	-	14
9/16" Hy-Gear®	68-0	-	9/16" Band, General Purpose All SS Clamps	200	-	-	14
Lax-On®	69-0	-	1/2" Band, Special Purpose All 300 Marine Clamps	-	-	-	22
Snaplock®	500	500/LS	1/2" Band, Quick Release Clamps	-	-	-	20
Snaplock®	550	550/LSS	1/2" Band, Quick Release Clamps	-	-	-	20
Fuel Injection	52F	905/FI	9 mm Band, Special Fuel Injection Clamps	FI	-	-	11
Micro-Gear®	62J	359	5/16" Band, All 316 SS Marine Clamps	-	-	-	10
Micro-Gear®	62M	345/MAH/MAS	5/16" Band, All SS Clamps	37/67	MMF-SS	MAH	10
Micro-Gear®	62P	325/MH	5/16" Band, Partial SS Clamps	35	MM	MH	10
Military	632	632	1/2" Band, Military Spec Clamps	MS	-	-	18
9/16" Hy-Gear®	63-4	-	9/16" Band, All 300 SS Marine Clamps	300	-	-	14
Lined	65-E	615*	9/16" Band, Lined Clamps, All 300 SS Clamps	94*	48	-	24
1/2" Hy-Gear®	67-1	625/HAS	1/2" Band, General Purpose All SS Clamps	64	H-SS	-	12
1/2" Hy-Gear®	67-4	620P	1/2" Band, All 300 SS Marine Clamps	63	-	-	12
1/2" Hy-Gear®	67-6	665	1/2" Band, All 316 SS Marine Clamps	-	-	-	12
Lined	67M	-	1/2" Band, All 316 SS Lined Marine Clamps	96	-	-	24
T-Bolt	30010	813	3/4" Band, T-Bolt Partial SS Clamps	B9200	-	-	28
T-Bolt	30011	811	3/4" Band, T-Bolt All SS Clamps	B9300	-	-	28
T-Bolt	30020	814	3/4" Band, T-Bolt w/ Bridge Partial SS Clamps	B9222	-	-	28
T-Bolt	30021	810	3/4" Band, T-Bolt w/ Bridge ALL SS Clamps	-	-	-	28
T-Bolt	30030	819	3/4" Band, Spring Loaded T-Bolt Clamps	B9226	-	-	30
WaveSeal ³⁶⁰ ®	36003	-	9/16" Band, Self-Adjusting Constant Pressure	-	-	-	8
SmartSeal™	37215	-	1/2" Band, Self-Adjusting Constant Pressure	-	-	-	8
SmartSeal™ HD	38215	-	5/8" Band, Self-Adjusting Constant Pressure	-	-	-	8
Non-Perforated	53302	53312	9 mm Band, W2 Non-Perforated Clamps	-	EB9	-	16
Non-Perforated	53303	53313	9 mm Band, W3 Non-Perforated Clamps	-	-	-	16
Non-Perforated	53304	53314	9 mm Band, W4 Non-Perforated Clamps	-	-	-	16
Non-Perforated	53305	53315	9 mm Band, W5 Non-Perforated Clamps	-	-	-	16
Non-Perforated	53402	53412	12 mm Band, W2 Non-Perforated Clamps	-	EB12	-	16
Non-Perforated	53403	53413	12 mm Band, W3 Non-Perforated Clamps	-	-	-	16
Non-Perforated	53404	53414	12 mm Band, W4 Non-Perforated Clamps	-	-	-	16
Non-Perforated	53405	53415	12 mm Band, W5 Non-Perforated Clamps	-	-	-	16

*Comparable Product

CELEBRATING



YEARS

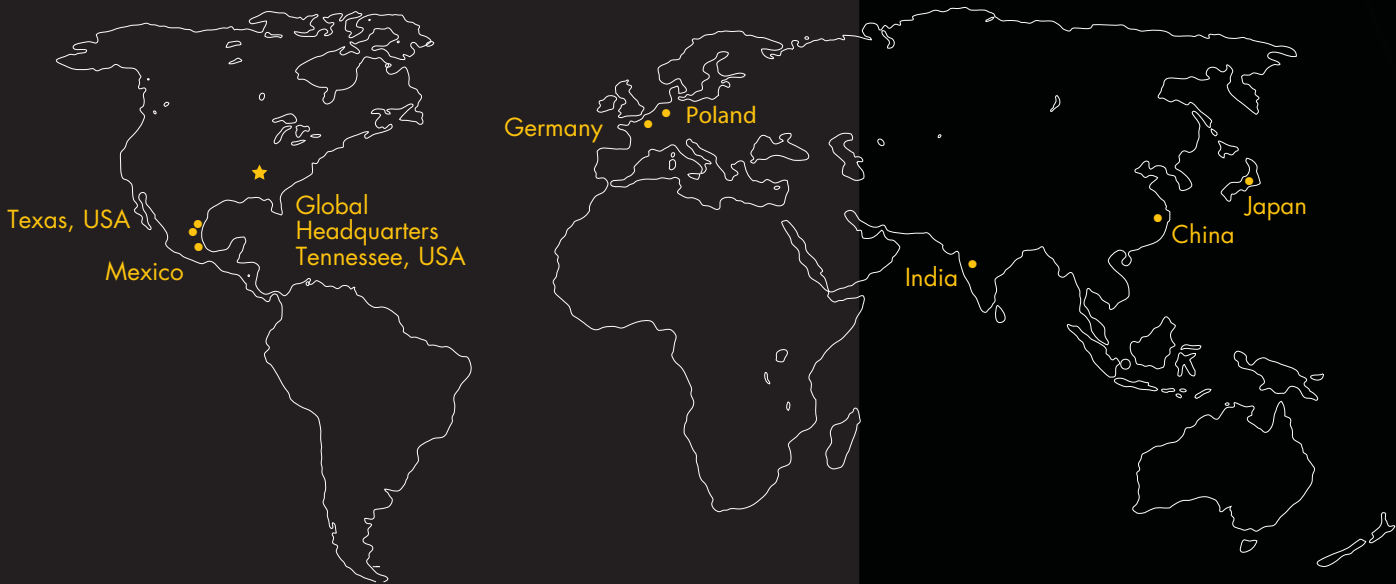

IDEALTRIDON.COM | PROVEN DESIGNS, BILLIONS OF TIMES

GLOBAL HEADQUARTERS

8100 TRIDON DRIVE SMYRNA, TN USA | 800.251.3220 | 615.459.5800

USA | MEXICO | CHINA | GERMANY | JAPAN | POLAND | INDIA



PLEASE RECYCLE

© 2014 Ideal Clamp Products, Inc. — Part No. 99999-1001-099 MAR 2014